

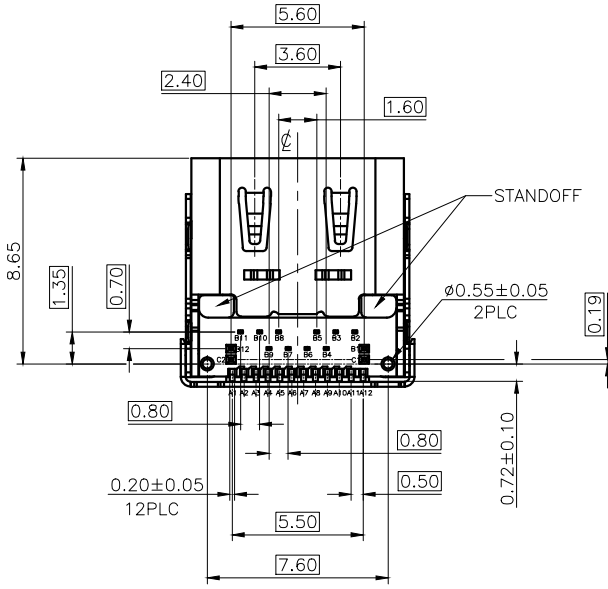
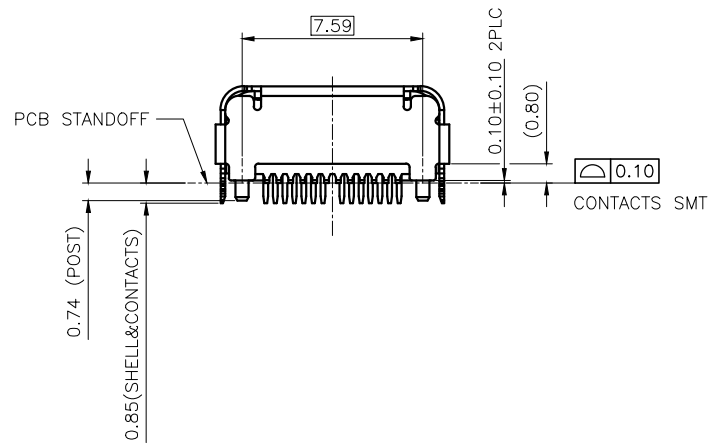
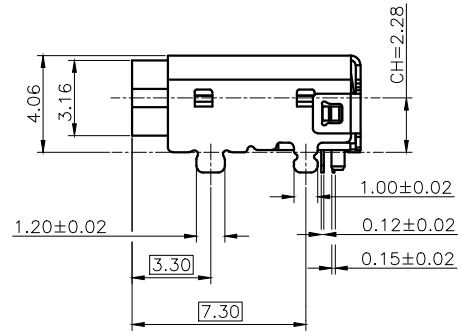
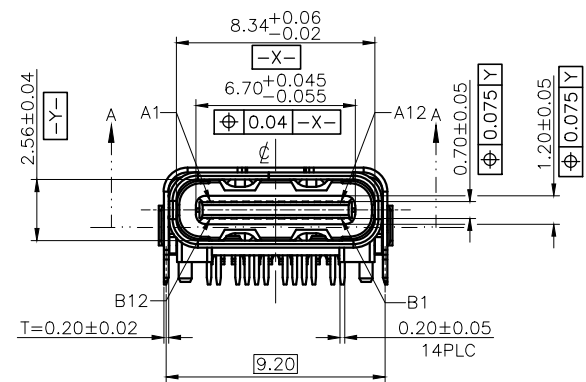
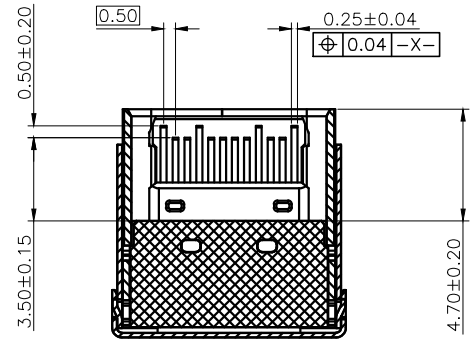


HF

Halogen Free



REV.	LOCATION	DESCRIPTION	DATE	DESIGN
A		PRODUCTION RELEASED	10/10/'16	Jerry

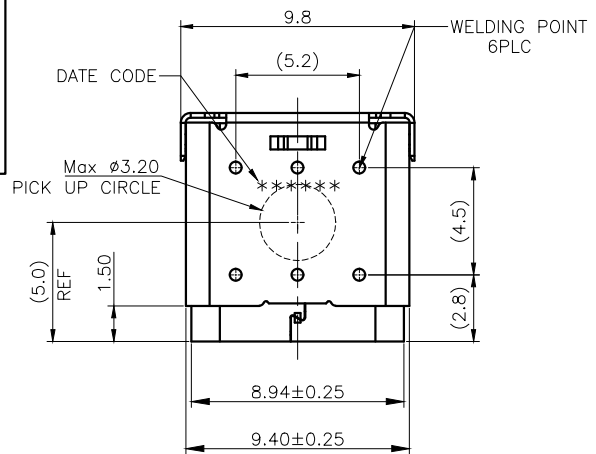

NO.	PART NAME	MATERIAL	FINISH
7	GROUND	STAINLESS STEEL	CLEAN
6	MID-PLATE	STAINLESS STEEL	UNDER PLATED: Ni 50u"
5	OUTER SHELL	STAINLESS STEEL	UNDER PLATED: Ni 50u"
4	INNER SHELL	STAINLESS STEEL	UNDER PLATED: Ni 50u"
3	TOP CONTACTS	COPPER ALLOY	50u"NI ALL OVER/MATTE SN100u" SOLDER TAIL
2	BOTTOM CONTACTS	COPPER ALLOY	50u"NI ALL OVER/MATTE SN100u" SOLDER TAIL
1	HOUSING	LCP	BLACK, UL 94V-0



DEREN
SHENZHEN DEREN ELECTRONIC CO., LTD

CUSTOMER DRAWING DATE: 9/17'18
DESIGN: CHECK: APPROVAL:

TITLE: USB TYPE C REC 24PIN CONNECTOR CH=2.28mm
P/N: 40-42562-A0200RHF
SHEET: 1/3
SCALE: N/A UNIT: mm

DIM	TOL	DIM	TOL
x.	±0.30	x.	±2'
.x	±0.25	.x	±1'
.xx	±0.15		
.xxx	±0.05		


DRAW NO. SC1601282
REV. A

HF

Halogen Free




REV.	LOCATION	DESCRIPTION	DATE	DESIGN
SEE SHEET 1				


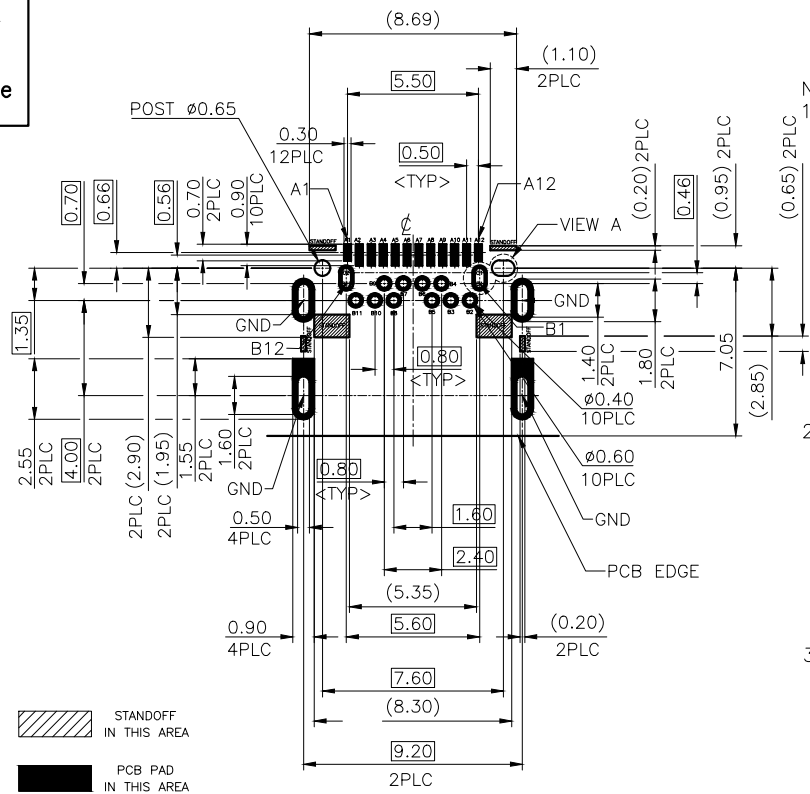


- NOTES :
- ELECTRICAL :
 - CONTACT CURRENT RATING : 5.0A FOR VBUS AND GND. (i.e., Pins A4,A9,B4,B9) 1.25A FOR Vconn AND GND. (i.e., Pins B5,A1,A12,B1,B12) 0.25A FOR ALL THE OTHERS CONTACTS.
 - INSULATION RESISTANCE : 100 MEGAOHMS MIN. AT 250VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE : 100VAC MIN.
 - LOW LEVEL CONTACT RESISTANCE : INITIAL 40mΩ MAX. AFTER 50mΩ MAX.
 - MECHANICAL CHARACTERISTICS :
 - INSERTION FORCE : 5N~20N .
 - EXTRACTION FORCE : 8N~20N FROM 1 TO 1000 CYCLES 6~20N FROM 1001 TO 10000 CYCLE.
 - DURABILITY : 10,000 MATING CYCLES.
 - OPERATING TEMPERATURE : -55°C TO +85°C
 - REFLOW SOLDER CAPABLE TO 260°C 10 SECS.

4. PART NUMBER INFORMATION: 40-42562-A 0200RHF
- HF: HALOGEN FREE
 - PACKAGE CODE: R: TAPE&REEL PACKING
 - RESERVED CODE: 0
 - LOGO CODE: 0: W/ DEREN LOGO 1: W/O LOGO
 - CONTACT PLATING CODE: 1: Au 2u" & Pd/Ni 30u" 2: Au 30u" 3: Au G/F
 - FORM CODE: 0
 - PIN NUMBER CODE: A:24 PINS



RECOMENED P.C.B LAYOUT
 THICKNESS=0.60mm
 TOLERANCE: ±0.05
 TOP VIEW

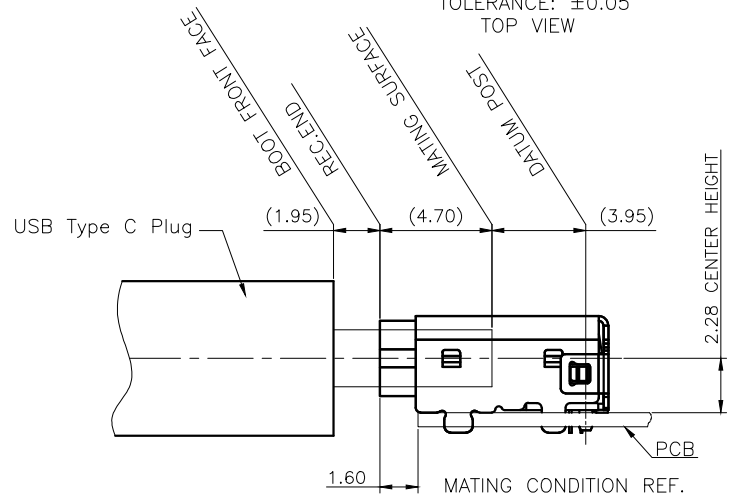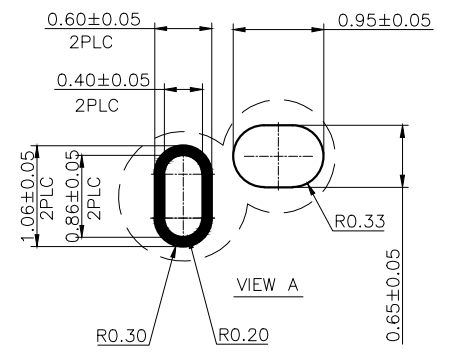

PIN DEFINE:

Pin	Signal Name	Description	Mating Sequence	Pin	Signal Name	Description	Mating Sequence
A1	GND	Ground return	First	B12	GND	Ground return	First
A2	SSTXP1	Positive half of first Super Speed TX differential pair	Second	B11	SSRXP1	Positive half of first Super Speed RX differential pair	Second
A3	SSTXn1	Negative half of first Super Speed TX differential pair	Second	B10	SSRXN1	Negative half of first Super Speed RX differential pair	Second
A4	VBUS	Bus Power	First	B9	VBUS	Bus Power	First
A5	CC1	Configuration Channel	Second	B8	SBU2	Sideband Use(SBU)	Second
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	Second	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2	Second
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	Second	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2	Second
A8	SBU1	Sideband Use(SBU)	Second	B5	CC2	Configuration Channel	Second
A9	VBUS	Bus Power	First	B4	VBUS	Bus Power	First
A10	SSRXn2	Negative half of second Super Speed RX differential pair	Second	B3	SSTXn2	Negative half of second Super Speed TX differential pair	Second
A11	SSRXP2	Positive half of second Super Speed RX differential pair	Second	B2	SSTXP2	Positive half of second Super Speed TX differential pair	Second
A12	GND	Ground return	First	B1	GND	Ground return	First

DIM	TOL	DIM	TOL
x.	±0.30	x.	±2'
.x	±0.25	.x	±1'
.xx	±0.15		
.xxx	±0.05		

DEREN
 SHENZHEN DEREN ELECTRONIC CO., LTD

CUSTOMER DRAWING	DATE	TITLE: USB TYPE C REC 24PIN CONNECTOR CH=2.28mm
DESIGN:	CWB	9/17'18
CHECK:		
APPROVAL:		



DRAW NO. SC1601282
 P/N: 40-42562-A0200RHF
 SHEET: 2/3
 SCALE: N/A UNIT: mm

HF

Halogen Free



REV.	LOCATION	DESCRIPTION	DATE	DESIGN
SEE SHEET 1				

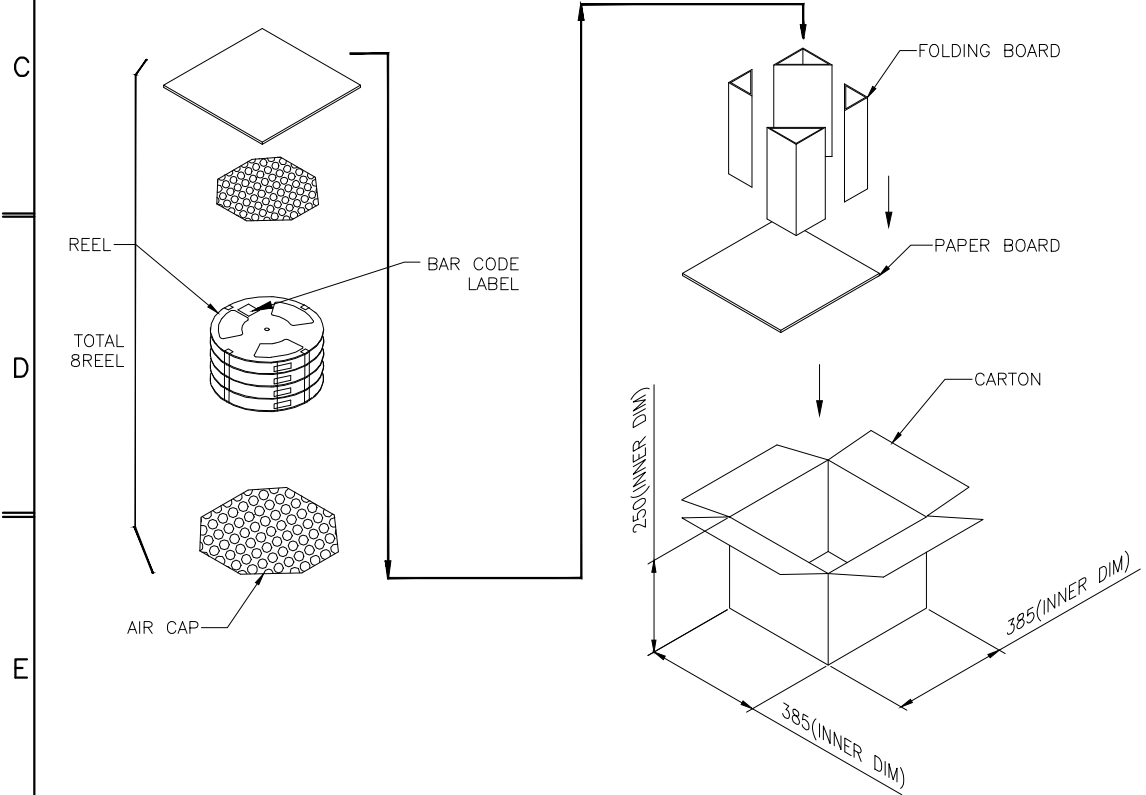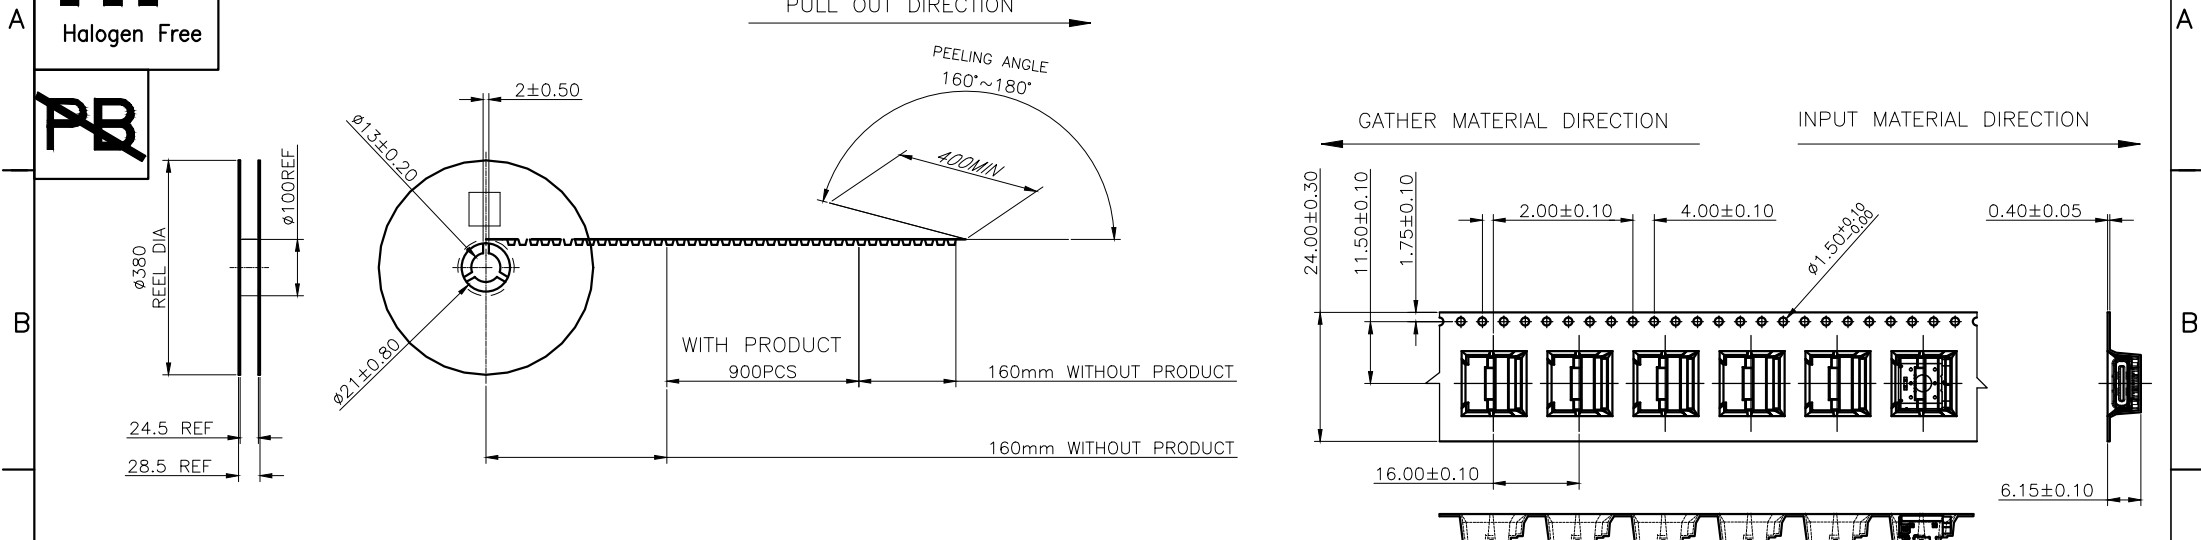

NOTES:(FOR REEL)
 PRODUCT MUST MEET CONTROLLED SUBSTANCES SPEC. ROHS 2.0
 PACKAGING MATERIAL IN PLASTIC, RUBER, INK, PIGMENT AND PAINT
 MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
 * CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED: 5 PPM.
 * LED, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM(COMBINED).
 * CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE
 REQUIREMENTS DEFINED PER EIA-481-B.

- MATERIAL:
 COVER TAPE: ANTISTATIC P.S T=0.05±0.01; COLOR: CLEAR
 CARRIER TAPE: ANTISTATIC P.S T=0.40mm ±0.05 , COLOR: BLACK
 REEL: PS UL94V-0
 SHIPPING BOX: CORRUGATED FIBER
- DIMENSION:
 REEL: SEE DRAWING
 BOX: SEE DRAWING
- QUANTITY: SEE TABLE
- WEIGHT: SEE TABLE
- PEELING RESISTANCE: 10gf~130gf (for 12~56mm)
- PEELING SPEED: 300mm/MINUTES

900	8	7200	40-42562-A0200RHF
PCS/REEL	REEL/BOX	PCS/BOX	PART NUMBER

DIM	TOL	DIM	TOL
x.	N/A	x.	N/A
.x	N/A	.x	N/A
.xx	N/A		



DEREN
 SHENZHEN DEREN ELECTRONIC CO., LTD

CUSTOMER DRAWING	DATE	TITLE: USB TYPE C REC 24PIN CONNECTOR CH=2.28mm
DESIGN:	CWB	9/17'18
CHECK:		
REV. A	APPROVAL:	

P/N:	40-42562-A0200RHF
SHEET:	3/3
SCALE:	N/A
UNIT:	mm