
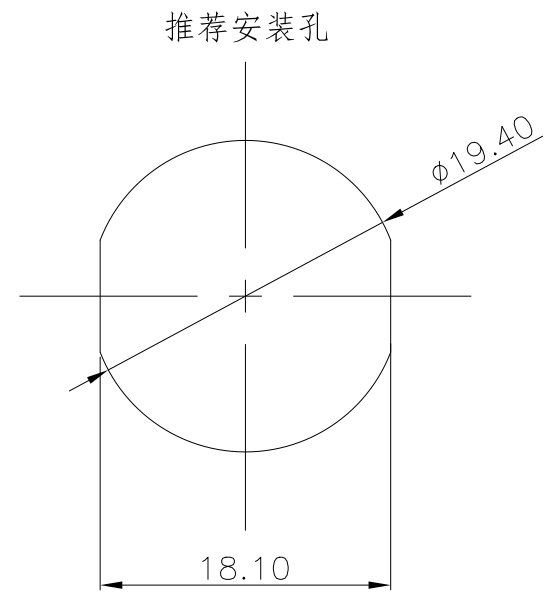


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
1			INITIAL RELEASE	24/01.05	Yy_D
3			UPDATE P/N	24/04,08	Yy_D

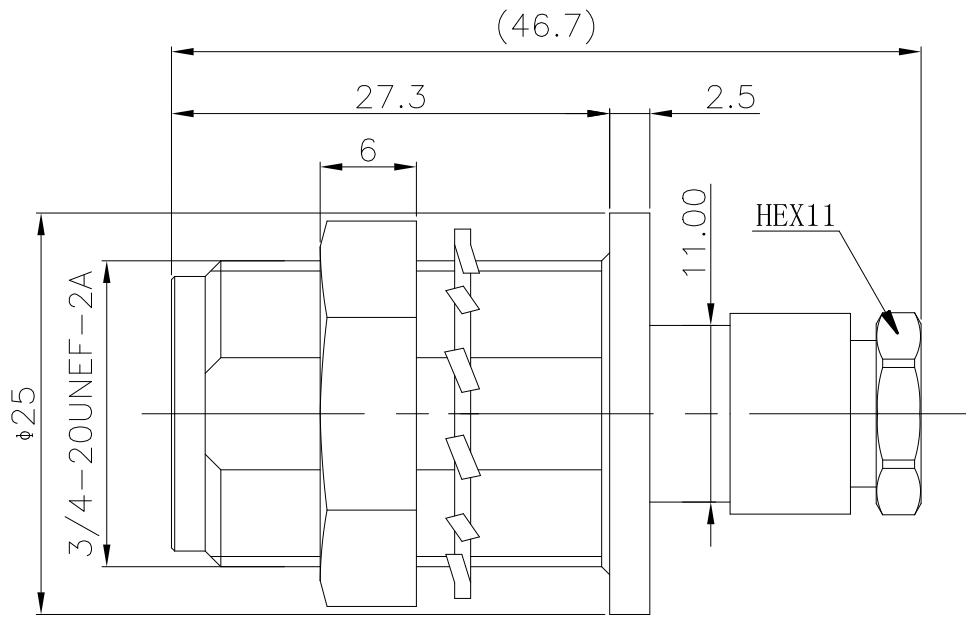


技术要求:

1. 配接RG58线缆;
2. 外导体: 不锈钢(SUS316)钝化, 内导体: 铍青铜(QBe2)镀金0.15um, 绝缘子: PTFE;
3. 零件所有材质均满足RoHS要求;
4. 接触阻抗, 内导体 $\leq 3m\Omega$ 、外导体 $\leq 2m\Omega$;
5. 满足96H盐雾要求

电气/机械指标要求

阻抗	频率(GHz)	VSWR<IL<	PIM>	耐压	绝缘电阻	抗拉强度
50 Ω	DC~6GHz	1.3	/	/	2500V 5000M Ω	/

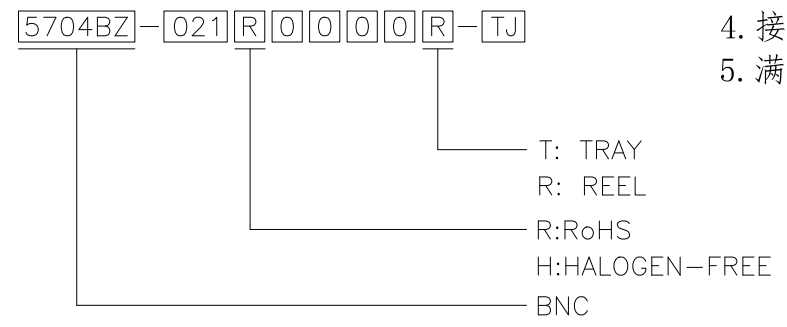

DIM	TOL	DIM	TOL		DEREN SHENZHEN DEREN ELECTRONIC CO., LTD			
X.	± 0.35	X.	$\pm 2'$		C-DWG:	TJ	DATE	TITLE: HN-K5Y CONN
.X	± 0.30	.X	$\pm 1'$	DRAW NO.	DESIGN:	Yy_D	24/04,08	P/N:
.XX	± 0.25			SCXXXXXXXX-X	CHECK:			SHEET: 1/1
				REV. 3	APPROVAL:			SCALE: N/A UNIT: mm