


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
1			INITIAL RELEASE	24/05.30	liangyihai

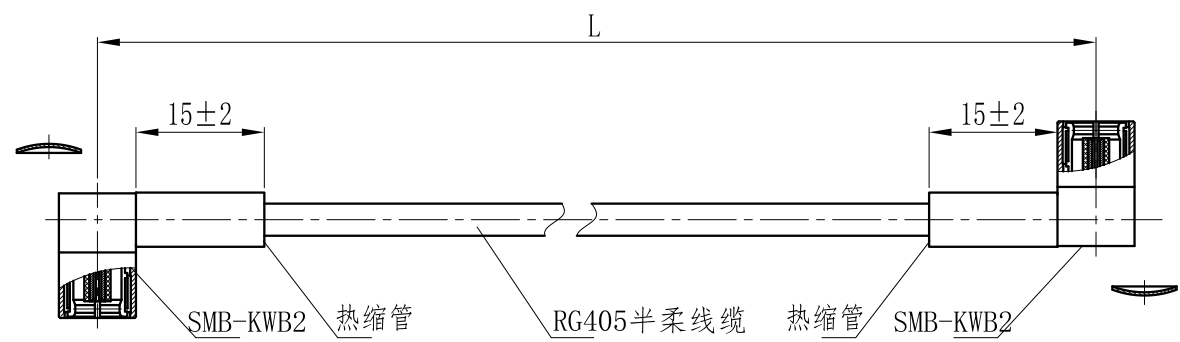

5702BZ-047R0000R-TJ



T: TRAY  
R: REEL  
R:RoHS  
H:HALOGEN-FREE  
SMB电缆组件

技术要求:

1. 耐压: 600V交流1s
2. 绝缘电阻: 500V直流1000MΩ;
3. 驻波: 0.7-2.2GHz <1.15;
4. 接头应满足对应图纸中的机械性能要求;
5. 外导体镀镍, 内导体镀金, 其余金属配件镀镍, 绝缘子PTFE;

电气/机械指标要求

频率 (GHz)	VSWR<	IL<	PIM>	耐压	绝缘电阻	抗拉强度	/
0.7-2.2GHz	1.15	0.43dB	/	600V	1000MΩ	/	/

DIM	TOL	DIM	TOL	 <b>DEREN</b> SHENZHEN DEREN ELECTRONIC CO., LTD
X.	±0.35	X.	±2'	
.X	±0.30	.X	±1'	
.XX	±0.25			
				<b>C-DWG:</b> TY <b>DATE:</b> 24/05.30 <b>DESIGN:</b> liangyihai <b>CHECK:</b> <b>REV.:</b> 1 <b>APPROVAL:</b> <b>TITLE:</b> SMB电缆组件 <b>P/N:</b> <b>SHEET:</b> 1/1  <b>SCALE:</b> N/A <b>UNIT:</b> mm