
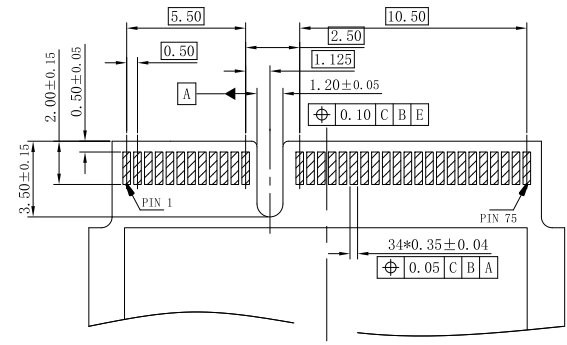
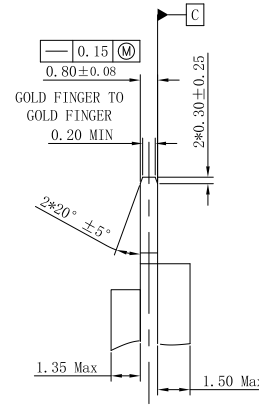




HF

Halogen Free

PLUG PCB

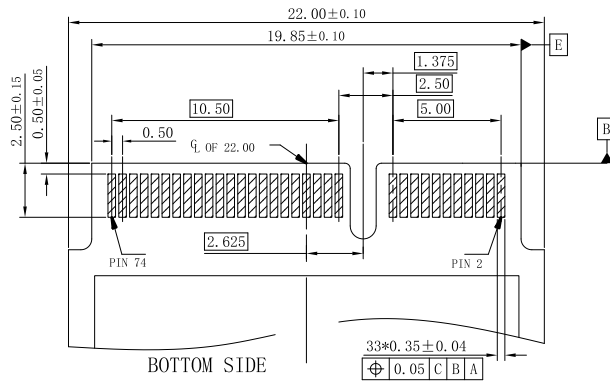

RECOMMENDED PCB LAYOUT (TOP VIEW)
DEFAULT TOLERANCE ±0.05mm

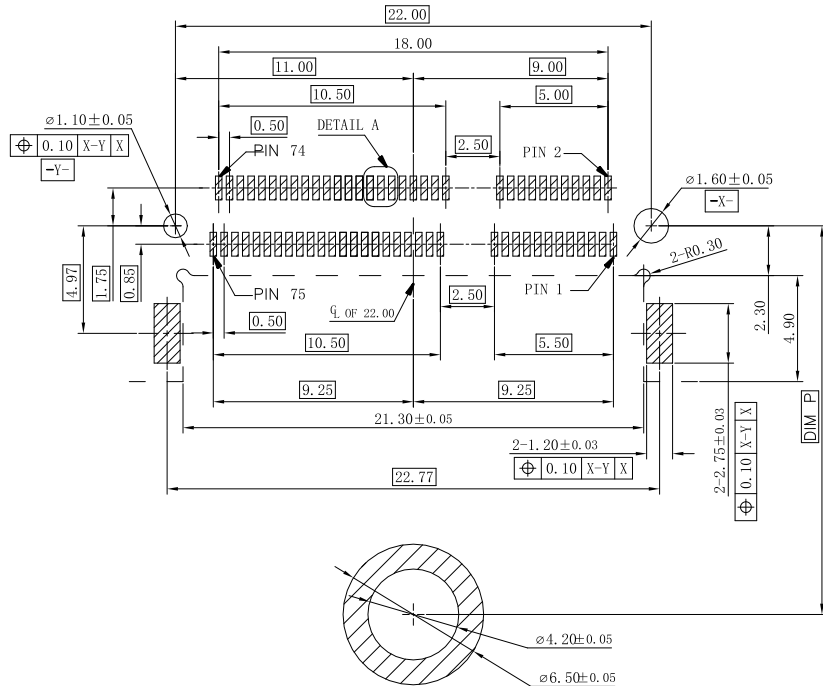


22110	114.00
2280	84.00
2260	64.00
2242	46.00
2230	34.00
3042	46.00
3030	34.00
MODULE TYPE	DIM P

DIM	TOL	DIM	TOL	DEREN SHENZHEN DEREN ELECTRONIC CO., LTD			
X.	±0.30	X.	±2°		C-DWG:	TY	DATE
.X	±0.25	.X	±1°		DESIGN:	Sid Guo	2024.04.11
.XX	±0.15				CHECK:	Mike Chen	2024.04.11
					APPROVAL:	Bill Lin	2024.04.11
				DRAW NO.	SC2107772-1		
				REV.	C	TITLE: M.2 GEN4 1.65H CH0.6mm KEY E RVS Dual SMT Type	
						P/N: SEE TABLE 1	
						SHEET:	2/3
						SCALE:	N/A
						UNIT:	mm



HF

Halogen Free

48

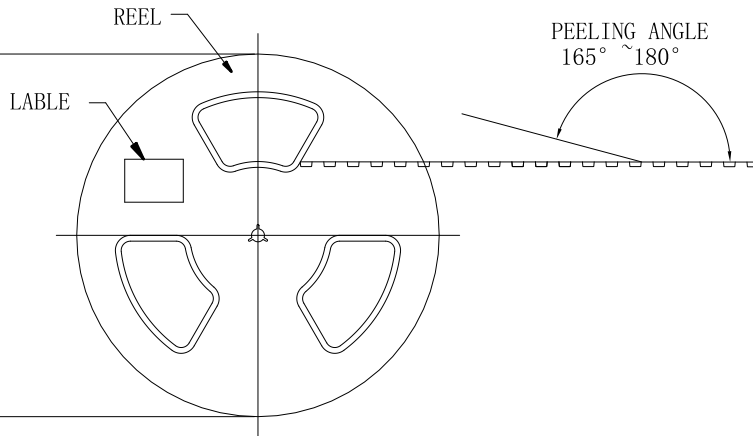

FEEDING DIRECTION

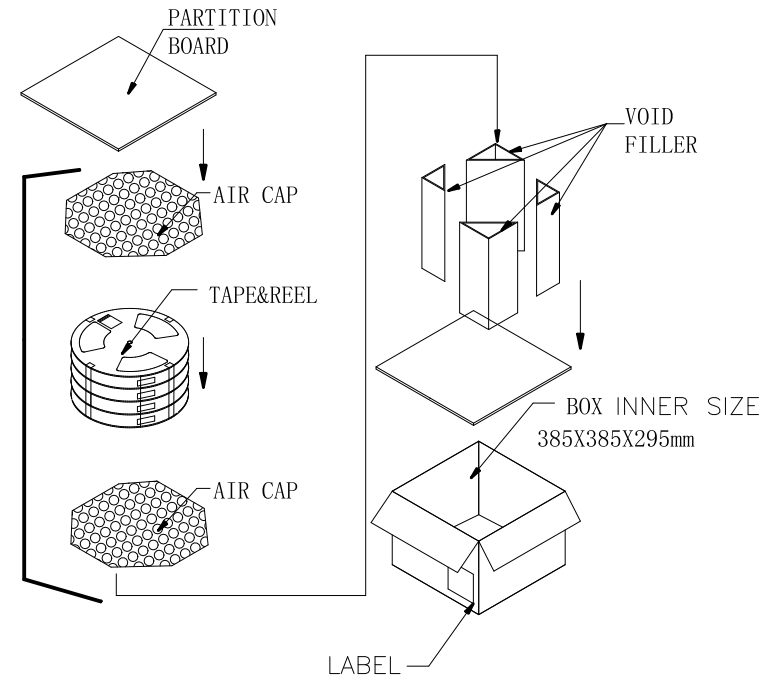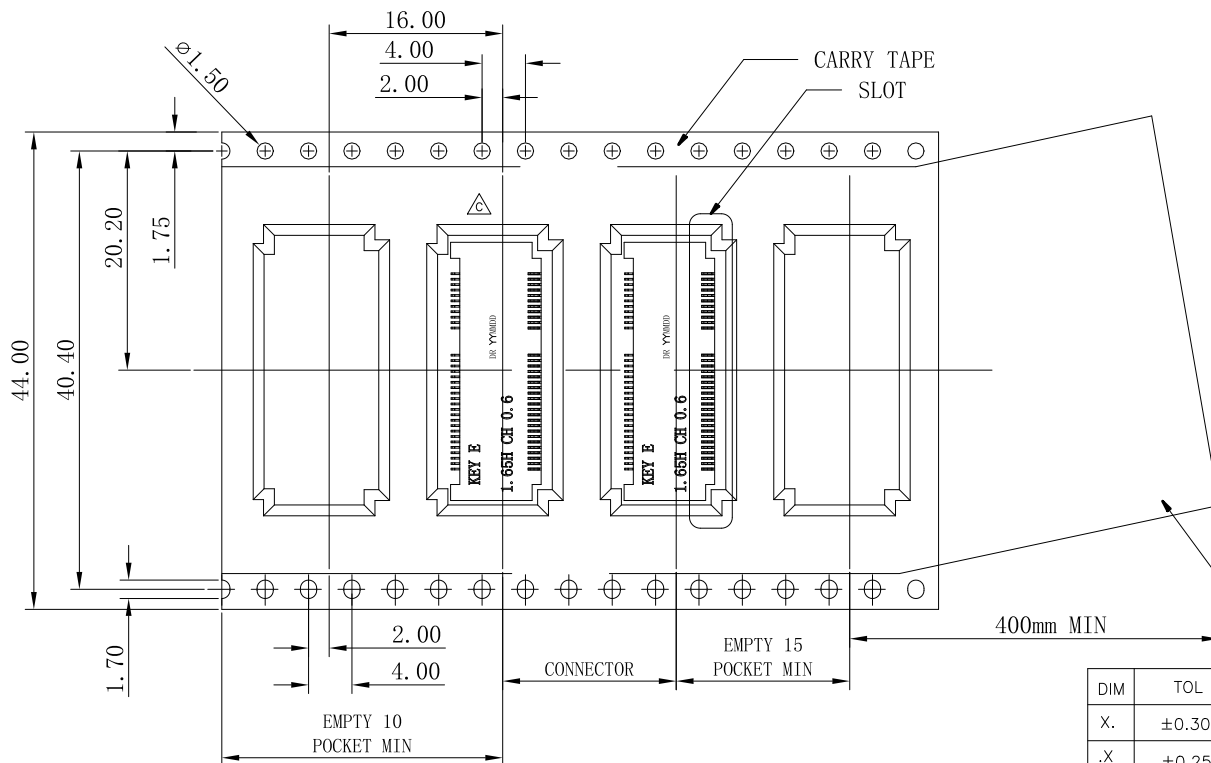

1500	5	7500
PCS/TAPE	REELS/BOX	PCS/BOX

DIM	TOL	DIM	TOL	 DEREN SHENZHEN DEREN ELECTRONIC CO.,LTD			
X.	±0.30	X.	±2°	C-DWG:	TY	DATE	TITLE: M.2 GEN4 1.65H CH0.6mm KEY E RVS Dual SMT Type
.X	±0.25	.X	±1°	DESIGN:	Sid Guo	2024.04.11	P/N: SEE TABLE 1
.XX	±0.15			CHECK:	Mike Chen	2024.04.11	SHEET: 3/3 
				REV.	C	APPROVAL: Bill Lin	2024.04.11
						SCALE: N/A	UNIT: mm