


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A	/	/	INITIAL RELEASE	23.05.12	Lane Zhang

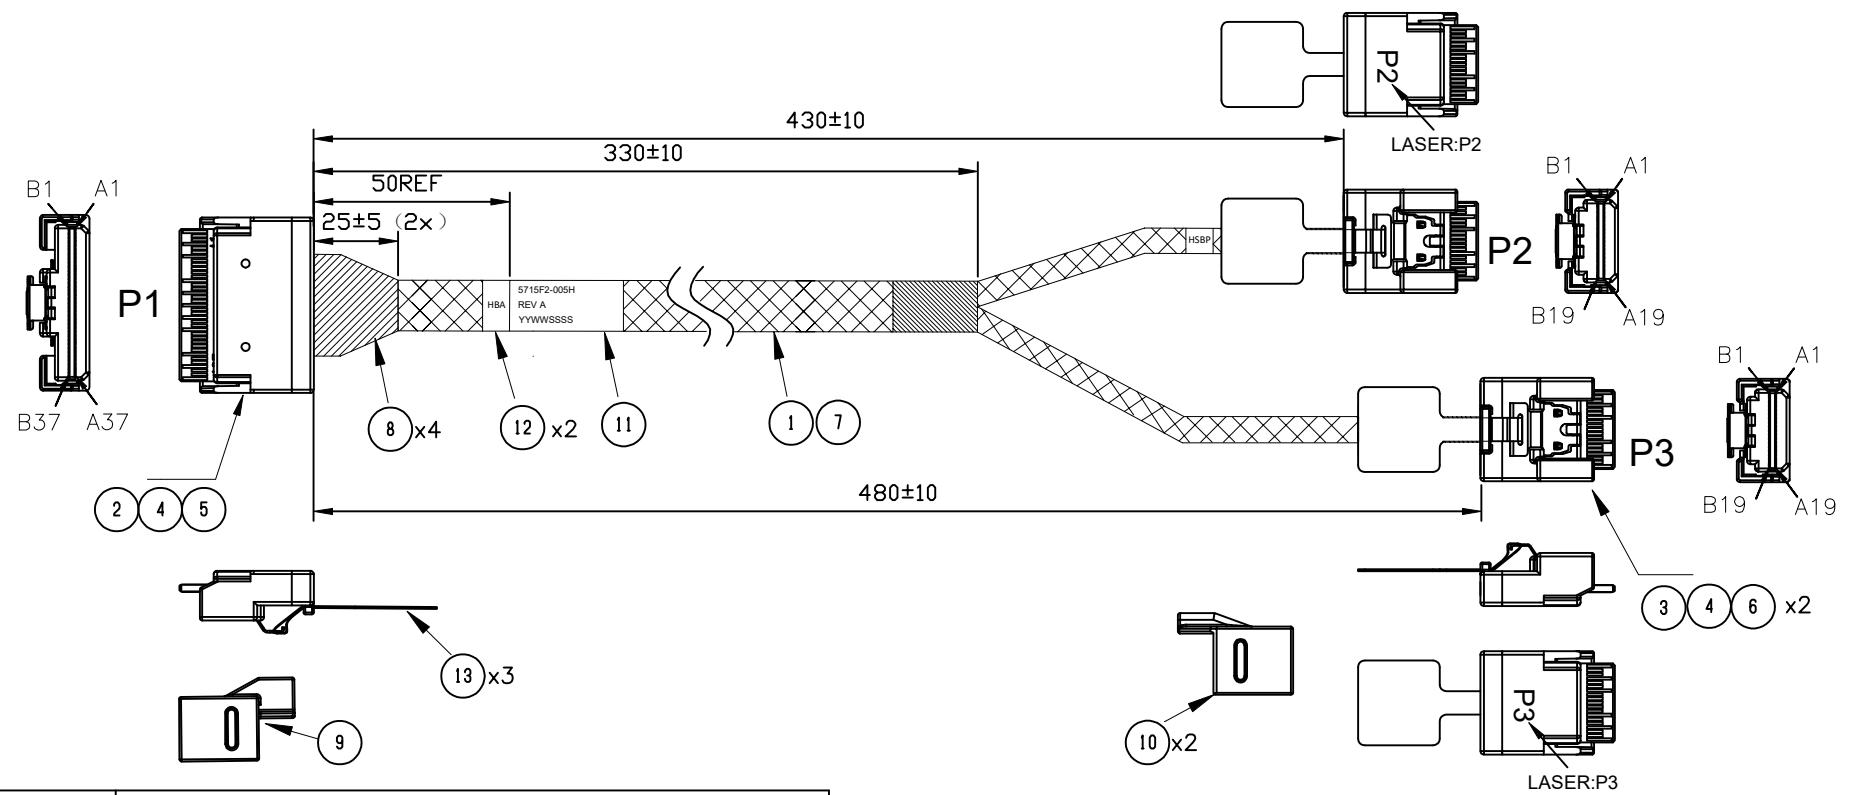

13	PULL TAB	W/PULL TAB LATCH FOR SLIMSAS
12	LABEL	W=15mm, T=0.08mm, WHITE
11	LABEL	W=30mm, T=0.08mm, WHITE
10	DUST COVER	SLIMSAS 4X DUST COVER, MATERIAL:PE
9	DUST COVER	SLIMSAS 8X DUST COVER, MATERIAL:PE
8	ACETATE TAPE	ACETATE, BLACK
7	WEAVE TUBE	PET, BLACK SINGLE ROOT
6	COVER	SLIMSAS 4X STR, BLACK
5	COVER	SLIMSAS 8X STR, BLACK
4	LACTH	SUS301 3/4H, T=0.25mm
3	PCB	SLIMSAS 38P;Au 30U'';100ohm
2	PCB	SLIMSAS 74P;Au 30U'';100ohm
1	RAW CABLE	PCIE 4.0;30AWGx1P+2D+AM;100 BLUE
No.	PART NAME	DESCRIPTION

Notes:

- ELECTRICAL PERFORMANCE:
 - 1-1. 100% OPEN & SHORT TEST.
 - 1-2. CONNECTION RESISTANCE: 3.0 Ohm MAX
 - 1-3. INSULATION RESISTANCE: 10M Ohm/DC300V/10ms (MIN)
- THE IMPEDANCE IS CABLE AREA : 100±10% OHM, CONNECTOR AREA: 100±15% OHM.
- THE CABLE ASSEMBLY ELECTRICAL AND MECHANICAL PERFORMANCE MUST BE MEET SAS 4.0
- THE CABLE ASSEMBLY SHALL BE MEET RoHS2.0 COMPLIANT

DIM	TOL	DIM	TOL
x	±0.15	x	±1*
.x	±0.10	.xx	±0.5*
.xx	±0.05		

UNIT: mm
Page: 1 of 2

DEREN
SHENZHEN DEREN ELECTRONIC CO.,LTD



INSPECTION DRAWING		DATE	TITLE: HBA SLIM 8X TO 4X Y CABLE
DESIGN:			Customer :
CHECK:			Customer P/N:
APPROVAL:			DEREN P/N: 5715F2-005H

DRAW NO.



REV. A

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A	/	/	INITIAL RELEASE	23.05.12	Lane Zhang


WIRING TABLE:

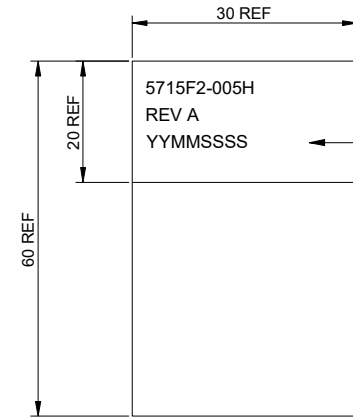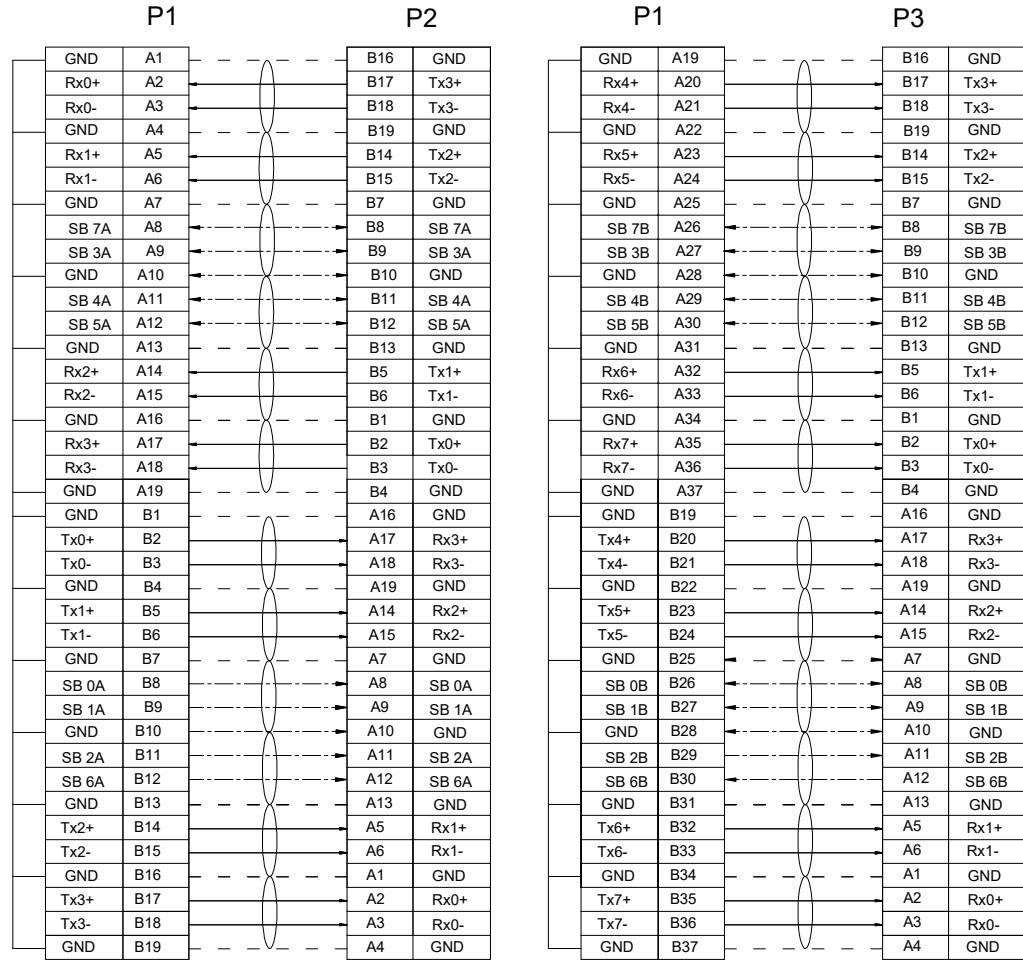

YY:年
MM:月
SSSS:序列号



DIM	TOL	DIM	TOL
x.	±0.15	x.	±1*
.x	±0.10	.xx	±0.5*
.xx	±0.05		

	DEREN		SHENZHEN DEREN ELECTRONIC CO.,LTD	
	INSPECTION DRAWING	DATE	TITLE: HBA SLIM 8X TO 4X Y CABLE	
	DESIGN:		Customer :	
	CHECK:		Customer P/N:	
Page: 2 of 2	REV. A	APPROVAL:		DEREN P/N: 5715F2-005H